



How to upgrade firmware on hegel integrated amplifiers

* Find your device on the network. This can be done by following the "How to find your device on the network" guide for either Mac or Windows.


* Click the update button on the device homepage.

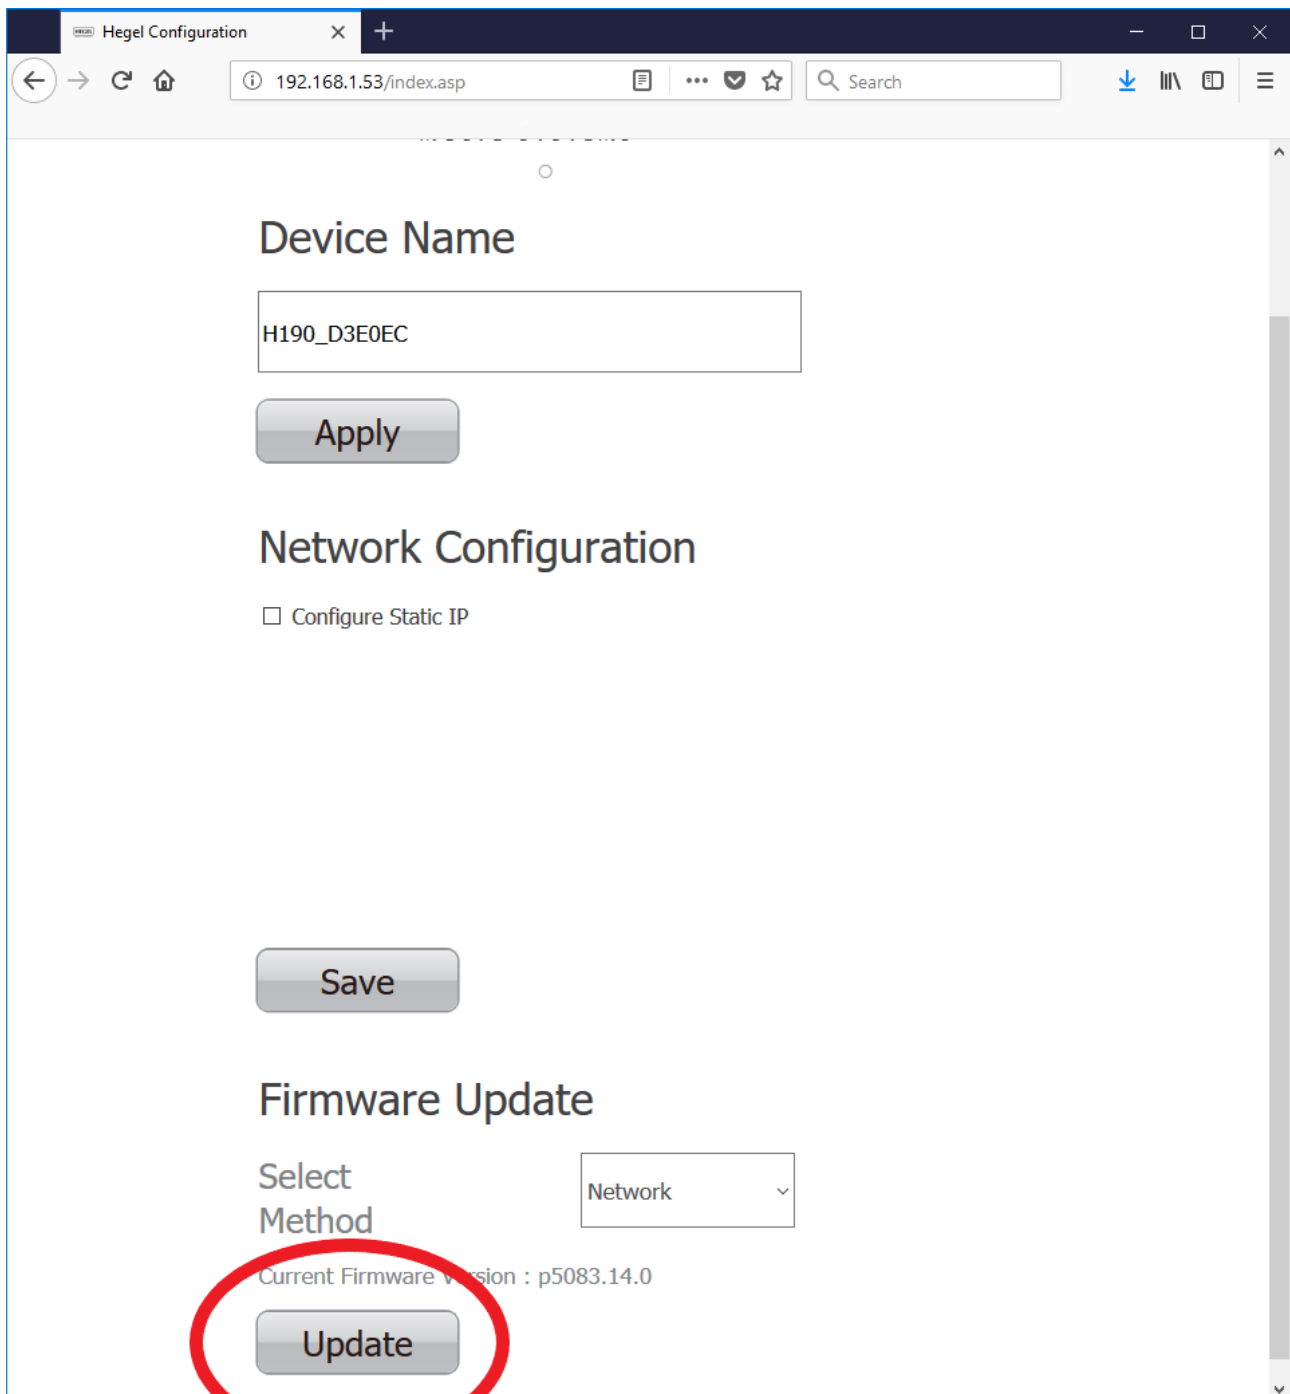

The device will now reboot into upgrade mode. You should see the following page for around 10 seconds while it is booting up.

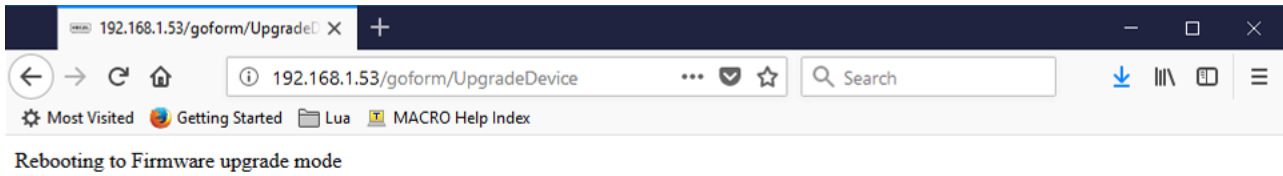

* The webpage will refresh and allow you to upload a firmware upgrade file. Choose the newest firmware file for your device and click "Update"

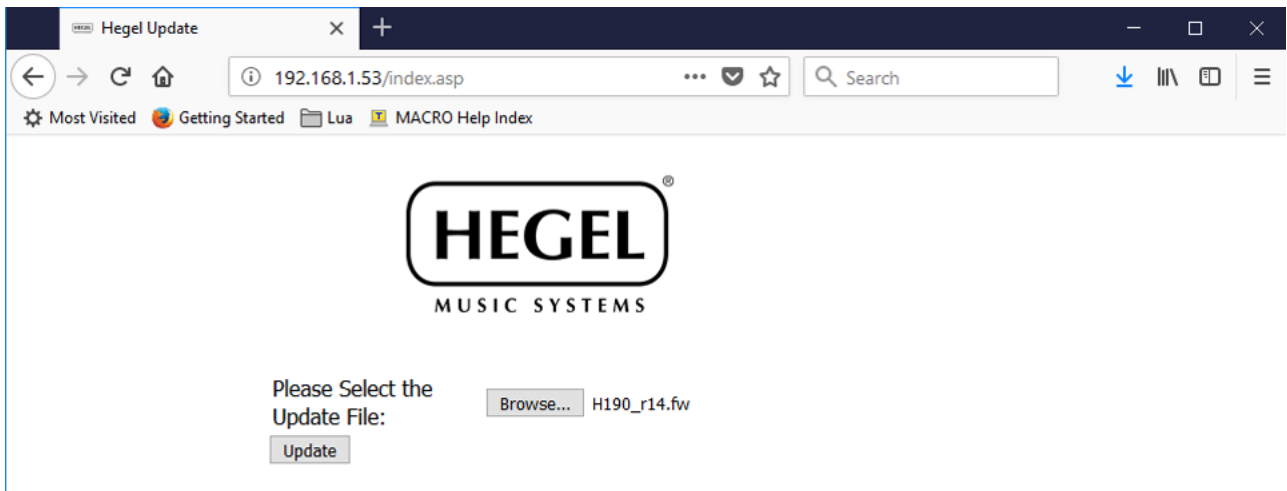

* A confirmation page will show up where you can see the Version number of the current and new software. Click OK to start the upgrade process.

192.168.1.53/confirm_download.asp

Most Visited Getting Started Lua MACRO Help Index

HEGEL
MUSIC SYSTEMS


Firmware Details

Firmware	Type	Version Number
Existing	limage	p5083.14.0
New	limage	p5083.14.0


Are you sure you want to update the firmware?

Ok Cancel

The firmware upgrade has now started and you will see the progress on the webpage.

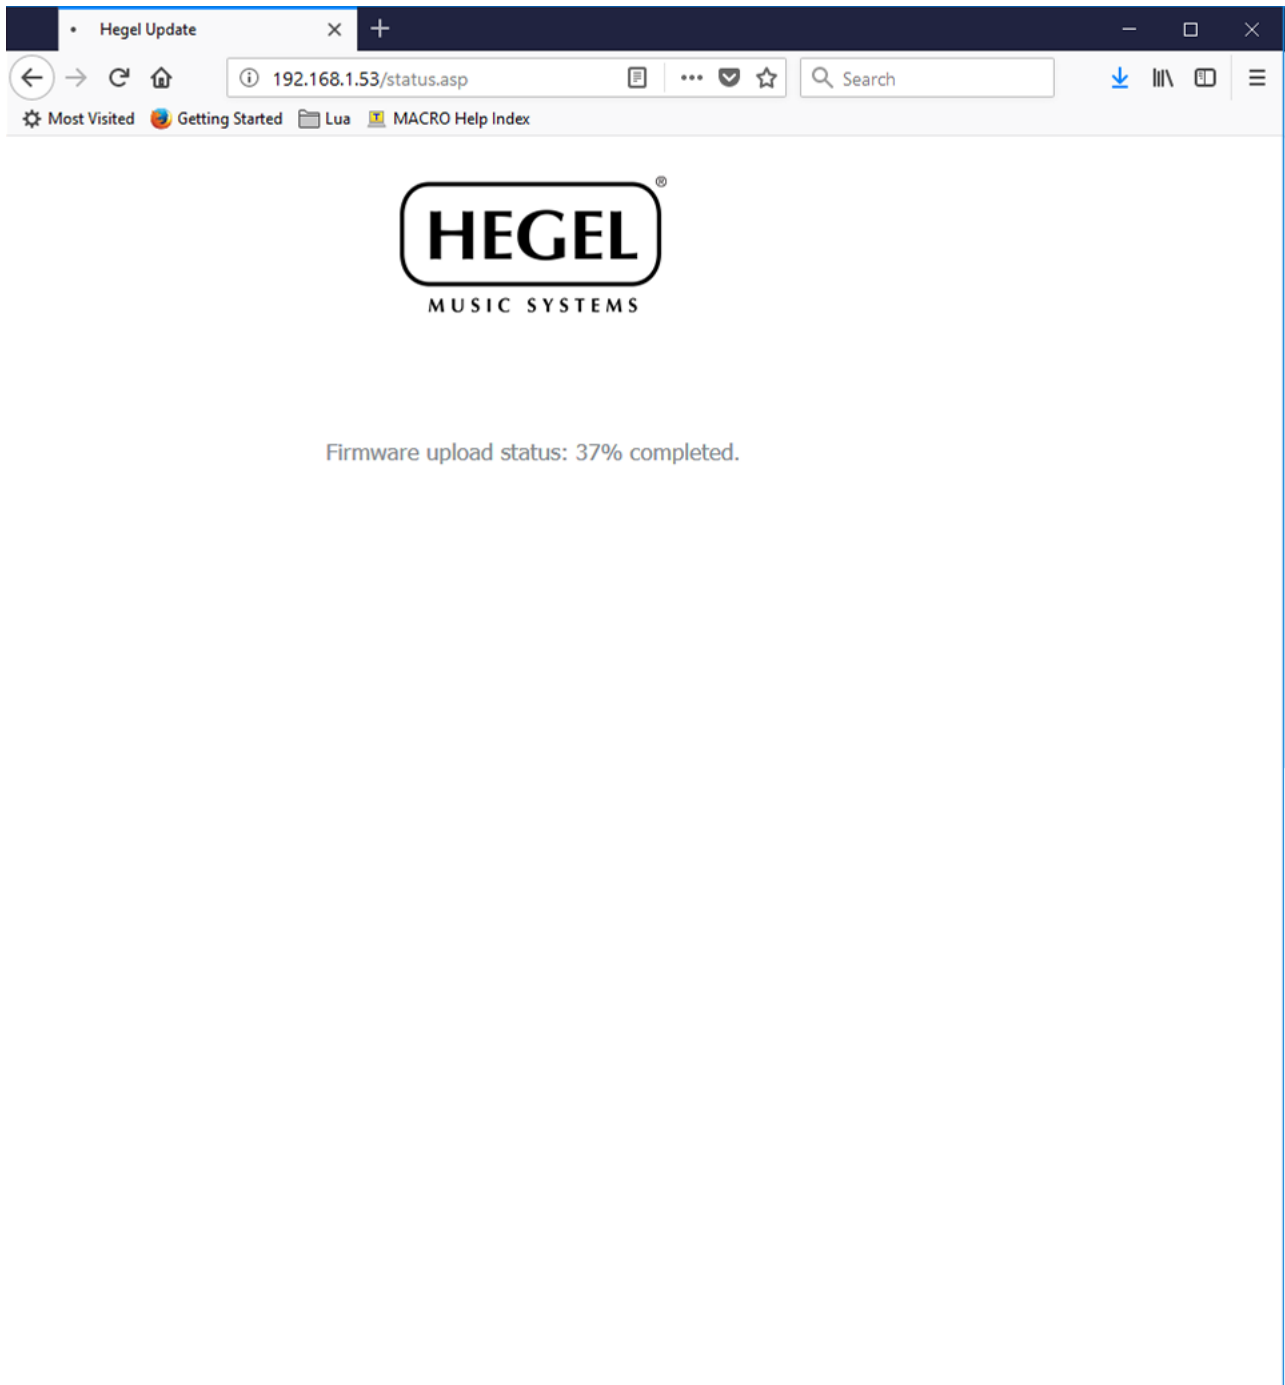

After 100% the device will reboot and the upgrade process is completed.

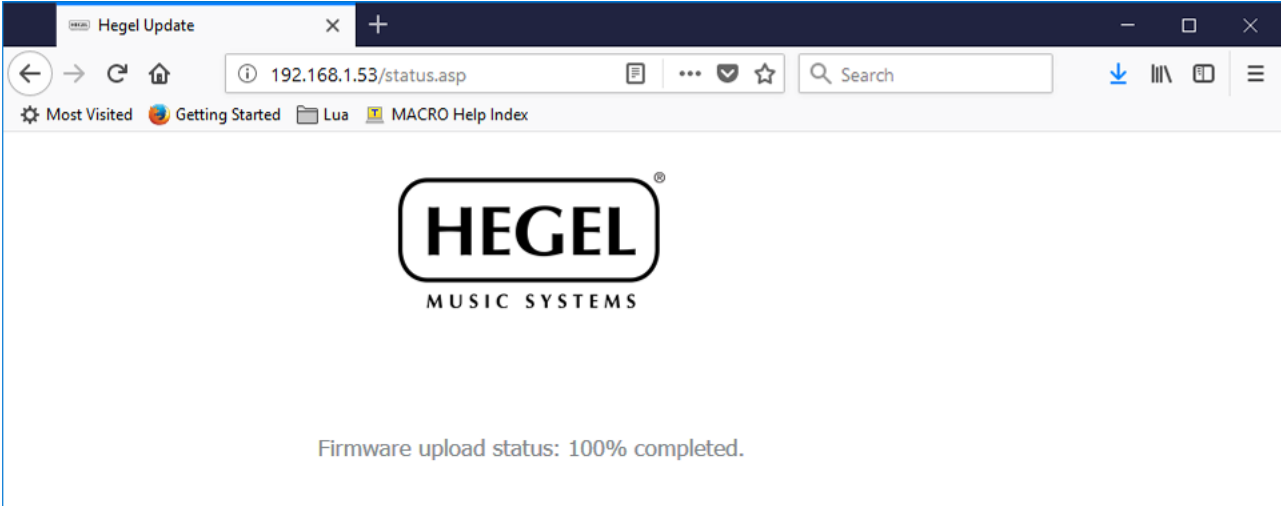

Troubleshooting

Issue: The webpage shows "Updating host image and rebooting to Application" but the screen on the device has frozen or only showing the Hegel logo.

Fix: Reboot the device.

Important: Never reboot the amplifier while an upgrade is in progress.